

Protects Against Leaks and Weather Damage



Product Specifications:

Recommended temperature range for general applications: -20°F. through +150°F.

Outer Coating Material:

Vinyl (PVC), Hardness: 85 Durometer (Shore A)


Internal Clip Material:

Aluminum or Steel

Flammability & Code Compliance:

Vinyl: FMVSS 302
FAA/FAR 23.853
UL 50

To Order Off-White Trim Seal




Trim-Seal is a flexible PVC Trim with a sponge rubber tubing attached to provide a secure seal for a variety of applications.


Many Applications

- Tonneau Covers
- Auto Trunks
- Car Hoods
- Tool Boxes
- Utility Vehicles
- Golf Carts
- RV Outside Compartments
- Truck Cabs
- Doors
- Boat Hatches
- ...many more

Bulb Locations Available




Typical Applications

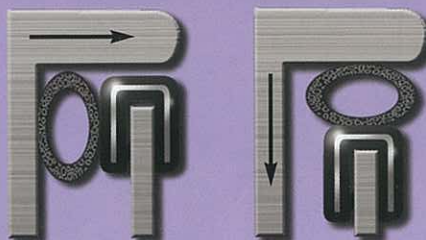

*A-B or D-E non-standard location, special order, non-returnable

Profile illustrations are approximately full size and are for reference only.
SEAL is sold in 250 foot increments.

Bulb Sizes Available

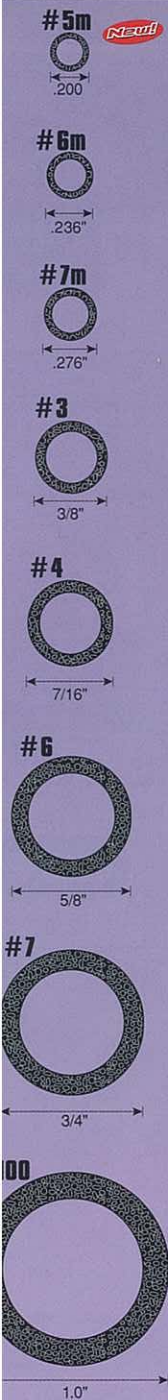

% maximum
compression
recommended
for optimum
performance.

2	3	4	Profile (Approx. full size)	5	6	Internal Clip	Part Number Example
Trim Series	Trim Color	Texture	Reference only	Edge Thickness	Leg Length	Bulb Location	
062 Series	W	1=Coarse Pebble 7=Sand		1/64"	3/8"	A	Alum.
	B	3=Pebble 7=Sand		1/32"	3/8"	C	
				1/16"	3/8"	E	
				5/64"	3/8"		
				3/32"	3/8"		
075 Series	W	1=Coarse Pebble 7=Sand		1/32"	7/16"	A	Alum.
	B	3=Pebble 7=Sand		1/16"	7/16"	C	
				5/64"	7/16"	E	
				3/32"	7/16"		
				1/8"	7/16"		
750 Series	B	2=Leather		1/32"	7/16"	A	Alum.
				1/16"	7/16"	C	
				5/64"	7/16"		
				3/32"	7/16"		
				1/8"	7/16"		
100 Series	W	1=Coarse Pebble 7=Sand		1/16"	9/16"	A	Alum. Steel
	B	3=Pebble 7=Sand		5/64"	9/16"	C	
	T	1=Coarse Pebble 7=Sand		3/32"	9/16"	E	
				1/8"	9/16"		
				5/32"	9/16"		
				3/16"	17/32"		
				1/4"	1/2"		
150 Series	W	2=Leather		1/16"	9/16"	A	Alum.
	B	2=Leather		5/64"	9/16"	C	
				3/32"	9/16"		
				1/8"	9/16"		
				5/32"	9/16"		
				3/16"	17/32"		
				1/4"	1/2"		
375 Series	W	3=Pebble 7=Sand		1/8"	3/4"	A	Alum.
	B	3=Pebble 7=Sand		5/32"	3/4"	C	
	T	3=Pebble 7=Sand		3/16"	23/32"	E	
				1/4"	11/16"		
				5/16"	21/32"		
				3/8"	5/8"		
				1/2"	19/32"		
350 Series	W	2=Leather		3/16"	3/4"	A	Alum.
	B	2=Leather		1/4"	11/16"	C	
				5/16"	21/32"		
				3/8"	5/8"		
				1/2"	19/32"		

B=black T=tan W=white

Jumbo Trim Seal

2 Trim Series	3 Trim Color	4 Texture	Profile (Approx. full size)	5 Edge Thickness	Leg (Fixed size)	6 Bulb Location	Internal Clip	Part Number Example
2000 Series	W	3=Pebble		1/2"	1"	A	Steel	
	B	3=Pebble		5/8"	15/16"	C		
	T	3=Pebble		3/4"	7/8"	E		

HOW TO ORDER

- Determine the **BULB SIZE** using column. ①
- Determine the **SERIES #** using column. ②
- Determine the **TRIM COLOR** using column. ③
- Determine the **TRIM TEXTURE** using column. ④
- Determine the **EDGE THICKNESS** using column. ⑤
- Determine the **BULB LOCATION** using column. ⑥

JUMBO TRIM-SEAL is sold in 100 foot increments.

ADDITIONAL *New* Trim Seals

 103B375B3X3/16E	 113B100B3X1/8E	 1959B150B2X5/32C	 1960B150B2X5/32A	 1962B150B2X3/16C
 1B150B2X1/8C	 3B150B2X1/8A	 1333B100B3X1/8E	 1961B100B3X1/4A	 105B100B3X1/8A
 109B375B3X3/16E	 202B100B3X1/8E	 1911100B3X3/16A	 135B375B3X3/16E	 CP966

Flap Seal

Seals tight to protect against weather damage

Durable PVC Plastic Trim

Exceptional Bond Surface

EPDM Sponge Rubber Flap

Strong Gripping Tongue


Individual Metal Clips Retain a Permanent Grip

Flap Seal is a flexible PVC trim with a EPDM sponge rubber flap attached to provide a secure seal in a variety of dynamic applications.

1 Flap Length	2 Trim Series	3 Trim Color	4 Texture	Profile (Approx. full size)	5 Edge Thickness	Leg Length	6 Flap Location	Internal Clip	Example Part Number
5B=1"	100 Series	W	1=Corse Pebble 7=Sand		1/16"	9/16"	A	Alum., Steel	1 Flap Length 2 Trim Series 3 Trim Color 6B 100 B 3 X 1/8 A Texture 4 Edge Thickness 5 Flap Length 6
6B=1.75"		B	3=Pebble 7=Sand		5/64"	9/16"			
7B=3"			3/32"		9/16"				
8B=1.56"		B	3=Pebble 7=Sand		1/8"	9/16"			
5B=1"	1375 Series	T	1=Corse Pebble 7=Sand		5/32"	9/16"	E	Alum.	7B
6B=1.75"		B	3=Pebble 7=Sand		3/16"	17/32"			
7B=3"			1/4"		1/2"				
8B=1.56"		B	3=Pebble 7=Sand		3/16"	1/2"			
5B=1"	1375 Series	T	3=Pebble 7=Sand		1/8"	3/4"	A	Alum.	7B
6B=1.75"		B	3=Pebble 7=Sand		5/32"	3/4"			
7B=3"			3/16"		23/32"				
8B=1.56"		B	3=Pebble 7=Sand		1/4"	11/16"			
5B=1"	1375 Series	T	3=Pebble 7=Sand		5/16"	21/32"	E	Alum.	7B
6B=1.75"		B	3=Pebble 7=Sand		3/8"	5/8"			
7B=3"			1/2"		19/32"				
8B=1.56"		B	3=Pebble 7=Sand		1/2"	19/32"			

B=black T=tan W=white

Typical Applications

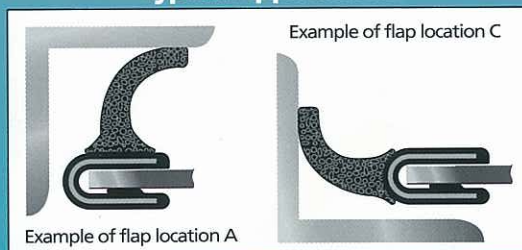

Flap Location A

Example of flap location A

Flap Location C

Flap Location E

1.75" Flap Length

HOW TO ORDER

- Determine the **FLAP LENGTH** using column. . . . 1
- Determine the **TRIM SERIES #** using column. . . . 2
- Determine the **TRIM COLOR** using column. . . . 3
- Determine the **TRIM TEXTURE** using column. . . . 4
- Determine the **EDGE THICKNESS** using column. . . . 5
- Determine the **FLAP LOCATION** using column. . . . 6